



Product Highlights:

- Various color solutions for different façade cladding design.
- Slim profile (15.4mm width) for façade integration
- Longer Daisy Chain & Auto addressing
- 5 years warranty

Light is gorgeous ARCHISHAPE® Tube Ultra Slim

An IP66-rated slim LED tube for any wall or façade media lighting.

Light is OSRAM

Our Brands

traxon e:cue

OSRAM

ARCHISHAPE® Tube Ultra Slim



ARCHISHAPE® Tube Ultra Slim is an IP66-rated slim LED tube for any wall or façade media lighting. Available in 300/500/1000mm lengths, the simple but robust construction allows up to maximum 12 meters of tubes to be daisy chained on a single power supply unit.

Advantages & Benefits

- Various color solutions for different façade lighting design (RGBW / RGB+W / RGB / Dynamic White)
- Slim profile (15.4mm width) and available in 300/500/1000mm lengths
- Longer Daisy Chain & auto addressing
- 5 years warranty
- IP66


Applications

- Accent/border dynamic effect for long ribbons
- Low resolution media façade
- Stadiums, Bridges, Hospitality, Office Buildings



Dimensions

Dimensions (Unit: mm)

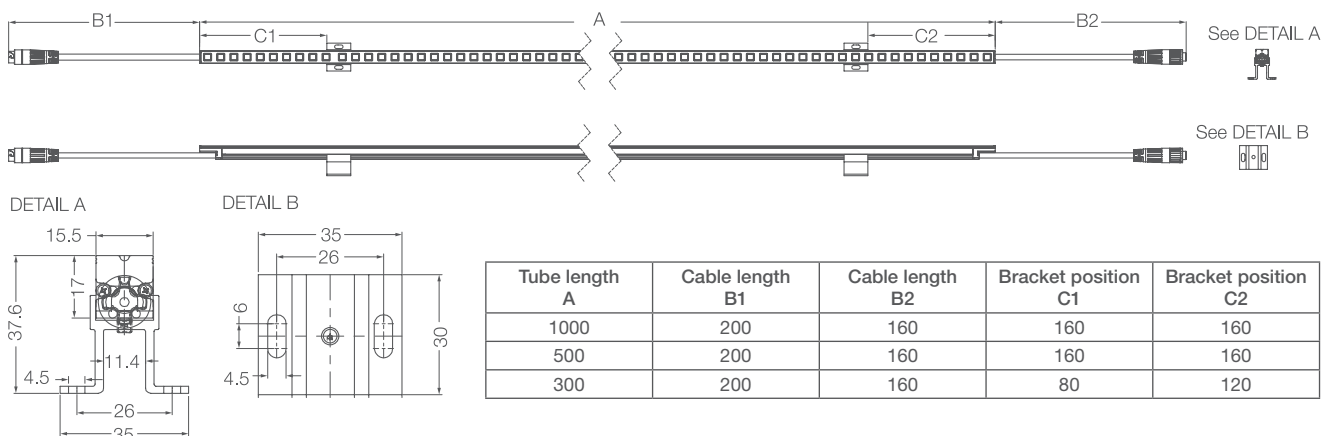

Product Reference

IC



Fixture

AS TUBE C1 RGBW 1000 10PXL 48V DV	AM381940055	RGBW	DC	48	12	100	492	1000	15.5	17.5	-25 to +50	DMX512
AS TUBE C1 RGBW 500 5PXL 48V DV	AM381960055	RGBW	DC	48	6.2	100	240	500	15.5	17.5	-25 to +50	DMX512
AS TUBE C1 RGBW 300 3PXL 48V DV	AM381970055	RGBW	DC	48	3.6	100	148	300	15.5	17.5	-25 to +50	DMX512
AS TUBE RGBW 1000 10PXL 48V DV	AM381760055	RGB+White	DC	48	12	100	528	1000	15.5	17.5	-25 to +50	DMX512
AS TUBE RGBW 500 5PXL 48V DV	AM381800055	RGB+White	DC	48	6.2	100	266	500	15.5	17.5	-25 to +50	DMX512
AS TUBE RGBW 300 3PXL 48V DV	AM381820055	RGB+White	DC	48	3.6	100	156	300	15.5	17.5	-25 to +50	DMX512
AS TUBE RGB 1000 10PXL 48V DV	AM381840055	RGB	DC	48	12	100	331	1000	15.5	17.5	-25 to +50	DMX512
AS TUBE RGB 500 5PXL 48V DV	AM381860055	RGB	DC	48	6.2	100	163	500	15.5	17.5	-25 to +50	DMX512
AS TUBE RGB 300 3PXL 48V DV	AM381870055	RGB	DC	48	3.6	100	97	300	15.5	17.5	-25 to +50	DMX512
AS TUBE DW 1000 10PXL 48V DV	AM381890055	Dynamic White	DC	48	12	100	933	1000	15.5	17.5	-25 to +50	DMX512
AS TUBE DW 500 5PXL 48V DV	AM381900055	Dynamic White	DC	48	6.2	100	470	500	15.5	17.5	-25 to +50	DMX512
AS TUBE DW 300 3PXL 48V DV	AM381910055	Dynamic White	DC	48	3.6	100	276	300	15.5	17.5	-25 to +50	DMX512

Accessories

AS TUBE STARTER CABLE 5-WIRE, 1M	AM382010055
AS TUBE STARTER CABLE 5-WIRE, 5M	AM382020055
AS TUBE STARTER CABLE 5-WIRE, 30M	AM382030055
AS INTERCONNECTION CABLE, 5-WIRE, 1M	AM382060055
AS INTERCONNECTION CABLE, 5-WIRE, 4M	AM382070055
AS TUBE END CAP WITH 120Ω TERMINATOR	AM382040055

Technical data subject to variation and change without notice.

Traxon e:cue

Sales enquiry: Traxon.ecue.newsletter@osram.com
www.traxontechnologies.com

